

November 09, 2023

REQUEST FOR QUOTATIONS

The Philippine Council for Health Research and Development (PCHRD), through its Bids and Awards Committee (BAC), requests PhilGEPS registered suppliers to submit **sealed quotations for the one (1) lot Refurbishment, Fabrication, Printing, Installation and Disassemble of Health Cluster Exhibit for the 2023 National Science and Technology Week (NSTW) Celebration with a total approved budget for the contract (ABC) in the amount of Nine Hundred Eighty Thousand Pesos (P 980,000.00).**

Specifications:

- **Please see attached Technical Specifications and Drawings**

Qualified bidders should submit their quotations to the address below **on or before November 15, 2023 (Wednesday), 10:00 AM**. Failure to strictly comply with the deadline and general conditions shall automatically disqualify the bidder/s from the bidding process. Winning bidder will be required to submit additional requirements as stipulated in the IRR of RA 9184.

PCHRD reserves the right to reject any or all quotations, to waive formality therein and to accept offers that may be considered most advantageous to the government.

For further information, please refer to:

Mr. Cirio D. Pangan Jr.

Secretariat, Bids and Awards Committee
Philippine Council for Health Research and Development
PCHRD Saliksik Building, Sikap Street,
DOST Main Compound, Gen. Santos Ave., Bicutan, Taguig City
Email: procurement@pchrd.dost.gov.ph
Tel. Nos. 8837-2942 loc. 504 or 506
Fax No. 8837-7536 or 8837-2942

(sgd.)
MARIA VIOLETA G. INTIA
Chair, BAC

Technical Specifications and Drawings

One (1) lot Refurbishment, Fabrication, Printing, Installation and Disassemble of Health Cluster Exhibit for the 2023 National Science and Technology Week (NSTW) Celebration


Date: November 20-26, 2023

Venue: Iloilo Convention Center, Iloilo City

Approved budget: Php 980,000.00

ITEM	SPECIFICATION	STATEMENT OF COMPLIANCE
1	<ul style="list-style-type: none"> • Date: November 20-26, 2023 (Ingress: November 20-21 / Actual event: November 22-26 / Egress: November 26) • Venue: Iloilo Convention Center, Iloilo City 	
2	<p>Backwall or drywall house type (refurbishment) - floor area: 8m x 15m x 5.7m</p> <ul style="list-style-type: none"> • (1) Wall separation and ceiling (8mx27m) estimated area <ul style="list-style-type: none"> ○ wood and metal support fabricated ○ latex paint finish ○ metal post • (1) lot graphics wall design interior • Wood perimeter fence with plant display • (4) wall panaflex wall display <ul style="list-style-type: none"> ○ Size (1m w x .20m T x 2m H) ○ Wood and metal support fabricated ○ Latex paint finish • Graphics print on panaflex • Needle punch carpet (blue) • Stand graphics print on sintra 	
3	<p>Lighted signage (refurbishment)</p> <ul style="list-style-type: none"> • (5) units acrylic build-up letter lighted <ul style="list-style-type: none"> ○ TECHZONE ○ ONE 4 U Bistro ○ H&W ○ S&T Science and Technology <p>Materials:</p> <ul style="list-style-type: none"> • Wood and metal support fabricated • Latex paint finish • Acrylic build-up letter (frosted white) • Graphics print on sticker 	
4	<p>TECHNZONE Area (8mx5m)</p> <ul style="list-style-type: none"> • Fabricated wall separation <ul style="list-style-type: none"> ○ Wood and metal support ○ (2) units arcade games (rental) ○ (3) units touch screen monitor (% client) ○ (1) unit TV monitor with stand 55" (rental) ○ Fabricated counter wood laminated ○ (3) units barstool wood finish (rental) ○ Lighting spotlight (rental) 	

5	<p>ONE 4 U Bistro area (8mx4mx3.5m H)</p> <ul style="list-style-type: none"> • Wood fabricated paint finish - white • (1) unit curve counter table with cabinet • (1) unit square table for customer • (2) units TV monitor wall mounted for menu and video (rental) • (7) units wood barstool (rental) • (1) unit curve entrance 	
6	<p>H&W Area (8mx6mx3.5m H)</p> <ul style="list-style-type: none"> • Wood fabricated paint finish • (5) units fabricated stand display with tablet (rental) • Fabricated curve entrance • Print graphics on panaflex • Lighted display (rental) • (4) single sofa chair (rental) • Hanging circle lighted ceiling (rental) <ul style="list-style-type: none"> ○ Strip light and acrylic cover ○ Wood and metal support 	
7	<p>Electrical and Lighting requirement (rental)</p> <ul style="list-style-type: none"> • (2) units 60 amp. breaker • 220 volt single phased • Lighting breaker 20 amp. • 20 to 30 outlet with 2 gang • Electrical wiring estimated 80m 	
8	<p>Ingress and Egress - Setup and installation</p> <ul style="list-style-type: none"> • Trucking and delivery • 2-night installation • Dismantling • Mobilization • Ingress - completeness of installation by November 22, 8AM 	
9	<p>Others</p> <ul style="list-style-type: none"> • Manning of exhibit during actual event (at least 2 personnel) • Meals and accommodation for staff during ingress, actual event, and egress • Transportation of exhibit materials to and from the venue 	

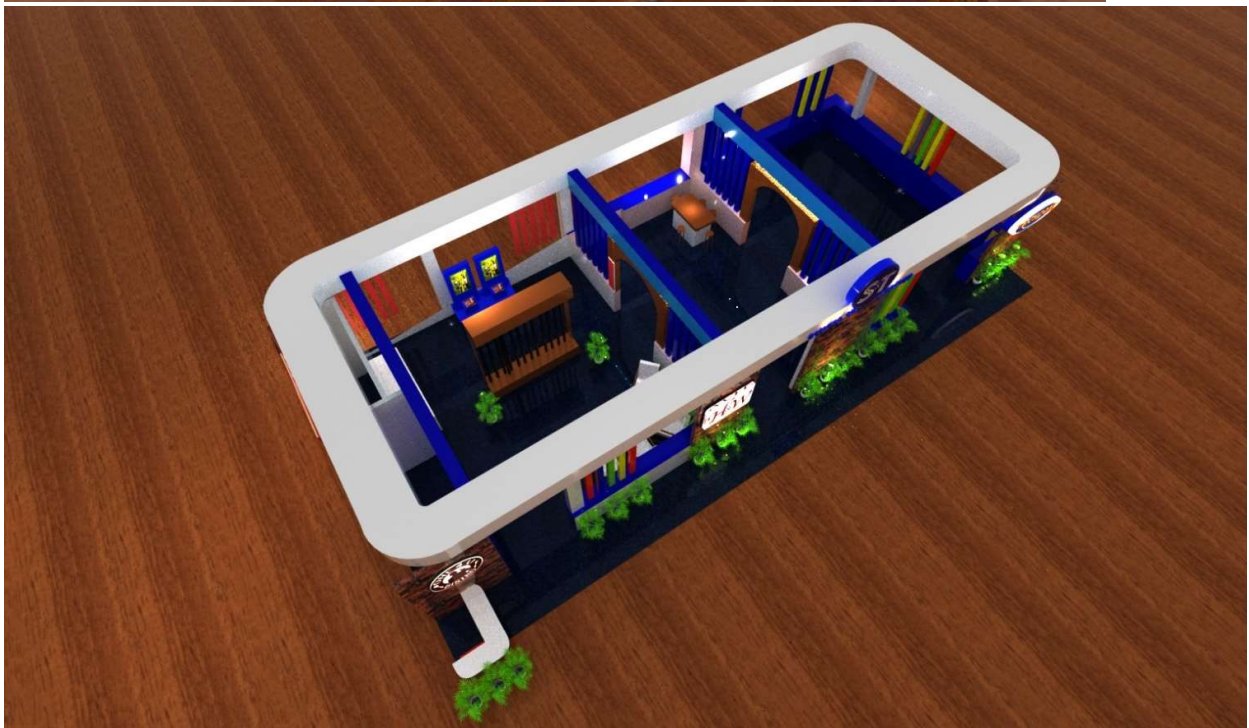

We hereby comply with the above-stated Technical Specifications and Drawings.

Submitted by : _____
(Name of Firm)

Signing Authority : _____
(Printed Name and Signature)

Designation : _____

Date : _____